

Compactors

Stationary

Compactors



Standard Features

- NEMA Remote Control Station on 13 ft Seal-Tite
- Key-Lock Start Switch
- Red Mushroom-Head Stop Button
- Solid State Motor Starter Overload – Adjustable 13-50 Amp
- NEMA 12/13 Panel Box
- Side Mounted Power Unit
- Power Unit Weather Cover
- Power Unit Factory Ready for 208-230-460 Volt 3 Phase
- Automatic Motor Starter Reset

Corporate Office
Chicago, Illinois



PH: 866-622-CTEC (2832)
www.c-tecinc.com

Compactors



QUALITY

By implementing the highest quality steel fabrication and welding techniques, C-TEC's self-contained compactors are designed and engineered to efficiently and economically handle maximum loads and stresses in commercial and medium industrial situations.

SAFETY

C-TEC models feature industrial grade electrical and hydraulic systems and conforms to all ANSI codes and safety requirements.

OPTIONAL FEATURES

Compactors can be built for your specific needs with custom-fitted side or rear load hoppers, security chutes, decks and other optional equipment.

INDUSTRY EXPERTISE


Specializing exclusively in the manufacturing of refuse equipment, C-TEC provides many years of experience in the industry. C-TEC provides quality equipment with cost-saving benefits.

SPECIFICATIONS

	C-TEC 200	C-TEC 300	C-TEC 400
Mfr. Rating:	2 cubic yards	3 cubic yards	4 cubic yards
Industry Rating:	1.58 cubic yards	2.55 cubic yards	2.95 cubic yards
Clear Top Opening:	58" x 42"	58" x 67.5"	58" x 67.5"
Hydraulic Cylinders:	6" bore x 54" stroke x 4 1/2" rod	6" bore x 78" stroke x 4 1/2" rod	6" bore x 78" stroke x 4 1/2" rod
Ram Penetration:	11"	10"	10"
Packing Force:	Normal: 46,700 lbs. Maximum Pack-Out: 55,100lbs	Normal: 46,700 lbs. Maximum Pack-Out: 55,100lbs	Normal: 48,100 lbs. Maximum Pack-Out: 56,500lbs
Ram Face PSI:	Normal: 27.3 PSI Maximum: 32.2 PSI	Normal: 27.3 PSI Maximum: 32.2 PSI	Normal: 24.7 PSI Maximum: 29 PSI
Hydraulic Pressure:	Normal: 1650 PSI Maximum: 1950 PSI	Normal: 1650 PSI Maximum: 1950 PSI	Normal: 1700 PSI Maximum: 2000 PSI
Ram Face Dimensions:	28.5" x 60"	28.5" x 60"	32.5" x 60"
Cycle Time:	50 seconds	47 seconds	47 seconds
Motor:	10 H.P. TEFC	15 H.P. TEFC	15 H.P. TEFC
Pump:	11.5 GPM vane	17.5 GPM vane	17.5 GPM vane
Weight:	4,600 lbs.	5,850 lbs.	6,350 lbs.
Frame Floor:	3/8" plate	3/8" plate	1/2" plate
Frame Sides:	3/16" plate	3/16" plate	1/4" plate
Breaker Bar:	8" x 6" x 3/4" angle	8" x 6" x 3/4" angle	8" x 6" x 3/4" angle
Ram Face:	3/4" plate	3/4" plate	3/4" plate
Ram Floor:	3/8" T1 plate	3/8" T1 plate	3/8" T1 plate
Ram Top:	1/4" plate	1/4" plate	1/4" plate
Ram Sides:	1/4" plate	1/4" plate	1/4" plate
Ram Guides:	UHMWPE	UHMWPE	UHMWPE

DIMENSIONS

A	119 1/2"	173 3/4"	173 3/4"
B	45 1/2"	71"	71"
C	74"	102 3/4"	102 3/4"
D	38 1/4"	38 1/4"	43 1/4"
E	48"	48"	53"

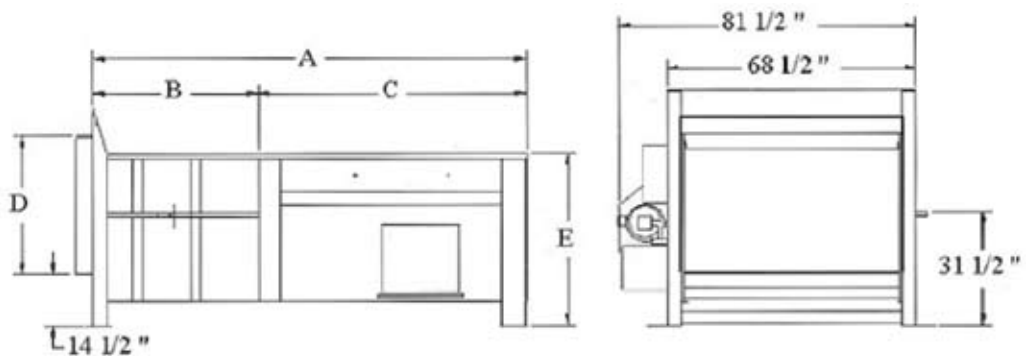

Pictures are for illustration only. Specifications are subject to change without notice to accommodate design changes. All compactors comply with ANSI standards, OSHA standards, and all electrical components are UL certified.